

## LINE OUTPUT PENTODE

Output pentode intended for colour TV line deflection circuits.

**HEATING:** Indirect by A. C. or D. C. ; series supply

Heater current

$I_f$  300 mA

Heater voltage

$V_f$  40 V



### DIMENSIONS AND CONNECTIONS

Base: Magnoval

Top cap: Type 1

Mounting: Additional supporting of the tube at the top is required.

Dimensions in mm

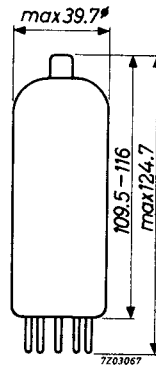

### CAPACITANCES

Grid No. 1 to filament

$C_{g1f}$  max. 0.2 pF

Anode to grid No. 1

$C_{ag1}$  max. 3.0 pF

$C_{ag1}$  2.5 pF

**TYPICAL CHARACTERISTICS** (measured under pulse conditions)

|                    |          |      |     |      |    |
|--------------------|----------|------|-----|------|----|
| Anode voltage      | $V_a$    | 160  | 50  | 70   | V  |
| Grid No. 3 voltage | $V_{g3}$ | 0    | 0   | 0    | V  |
| Grid No. 2 voltage | $V_{g2}$ | 160  | 175 | 205  | V  |
| Grid No. 1 voltage | $V_{g1}$ | 0    | -10 | -11  | V  |
| Anode current      | $I_a$    | 1400 | 800 | 1100 | mA |
| Grid No. 2 current | $I_{g2}$ | 45   | 70  | 85   | mA |

**OPERATING CONDITIONS** (D.C. feedback)

Cut-off voltage

The minimum required cut-off voltage ( $-V_{g1}$ ) during flyback at  $V_a = 7000$  V and at line frequency is at :

$$\begin{aligned} V_{g2} = 150 \text{ V} : V_{g1} &= -175 \text{ V} \\ V_{g2} = 200 \text{ V} : V_{g1} &= -195 \text{ V} \\ V_{g2} = 250 \text{ V} : V_{g1} &= -215 \text{ V} \end{aligned}$$

Minimum required anode voltage during the scanning period :  $V_a$  min. See page 6

Minimum required screen grid voltage :  $V_{g2}$  min. See page 4, 5

Recommended screen grid series resistor :  $R_{g2}$  rec See page 4, 5

Decoupling capacitors in the grid no. 2 and/or grid no. 3 circuit

In circuits where decoupling capacitors in the grid no. 2 or the grid no. 3 circuits are applied, incidental flashover in the tube may give rise to excessive discharge currents and component or tube failure.


Therefore it is recommended to limit the discharge currents from these capacitors by means of a  $100 \Omega$  resistor between  $g_2$  and the  $g_2$ -bypass capacitor and a  $1000 \Omega$  resistor between  $g_3$  and the  $g_3$ -bypass capacitor. The  $1000 \Omega$  resistor should be protected by a spark-gap connected between  $g_3$  and earth.

Hum


At  $Z_{g1} = 200 \text{ k}\Omega$  ( $f = 50 \text{ Hz}$ ),  $V_{kf \text{ RMS}} = 220 \text{ V}$  and without wiring and socket capacitance, the equivalent grid hum voltage is less than 5 mV.



Min. required  $V_{g2}$  and recommended  $R_{g2}$   
 Non-stabilized supply voltages.

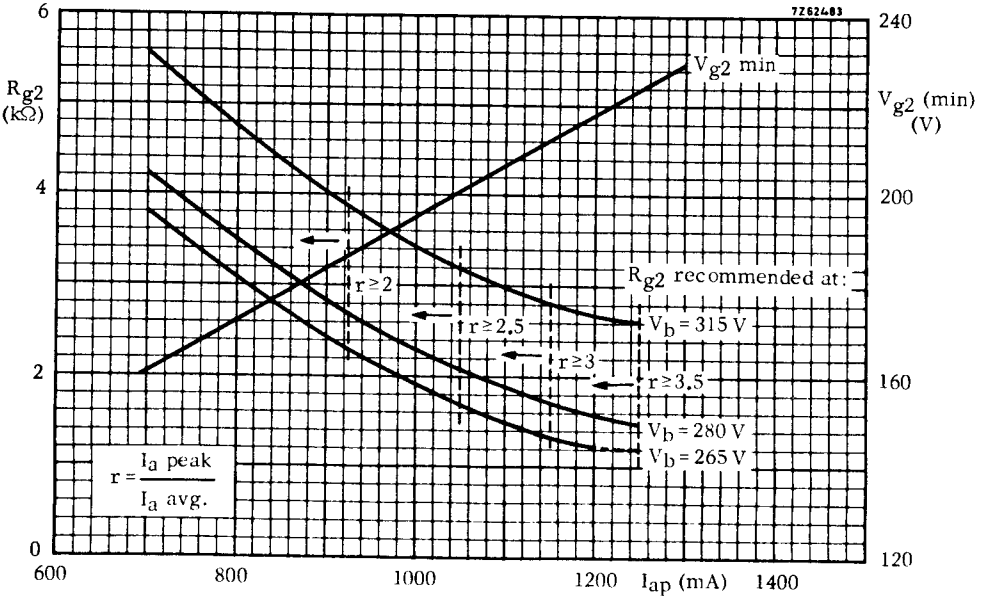


Min. required  $V_{g2}$  and recommended  $R_{g2}$   
 Stabilized supply voltage.

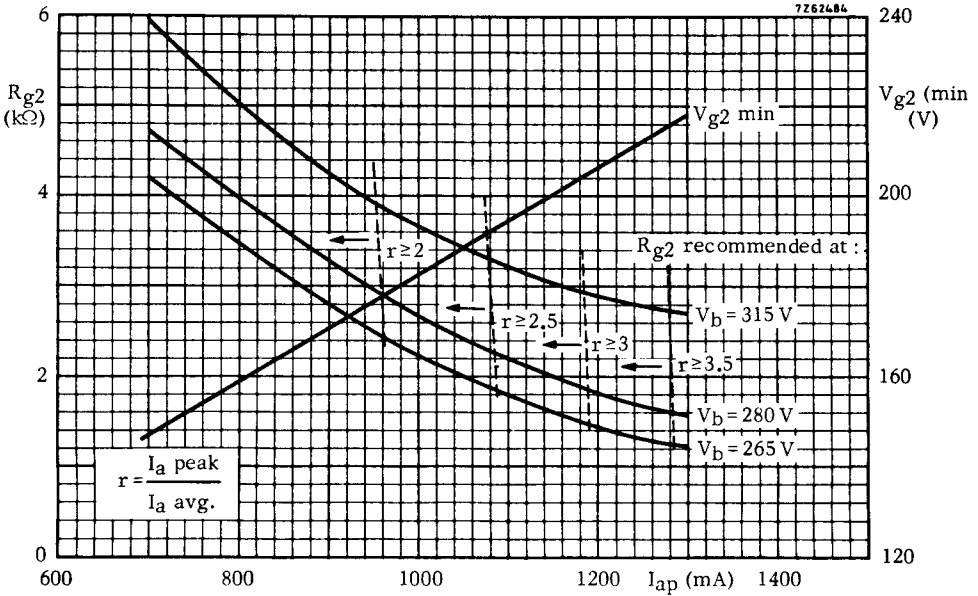


The above graphs concern the design of a line-output circuit adjusted at a beam current of 1000  $\mu$ A and a nominal mains voltage.


If the recommended  $R_{g2}$  is used,  $V_{g2}$  will be equal to higher or than the specified  $V_{g2}$  min, and there will be adequate reserve in anode peak current throughout the life of the tube. (Tolerances of deflection-components and 10 % mains voltage fluctuations taken into account).




Min. required anode voltage, during the scanning period.

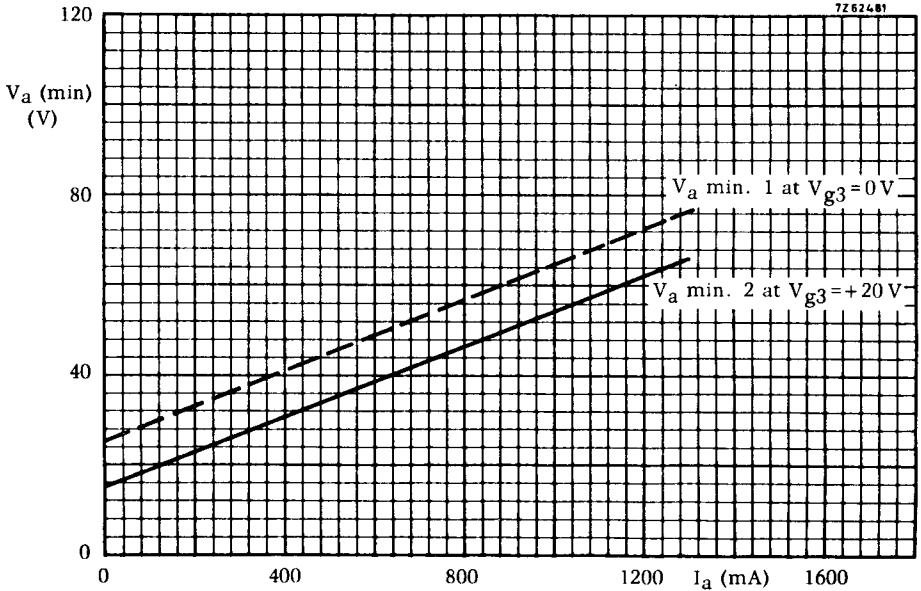

To suppress Barkhausen interference and to ensure stability, the anode load line should not be allowed to drop below the  $V_a$  line shown in the diagram. If  $V_a$  min. must be low, the  $V_a$  min. 1-line can be shifted over 10 V to  $V_a$  min. 2, provided a D.C. voltage of at least +20 V is applied to the beam plate ( $g_3$ ). To compensate for the influence of mains voltage fluctuations, the specified values of  $V_a$  min. must be increased with 10 % of the anode supply voltage when not stabilized.

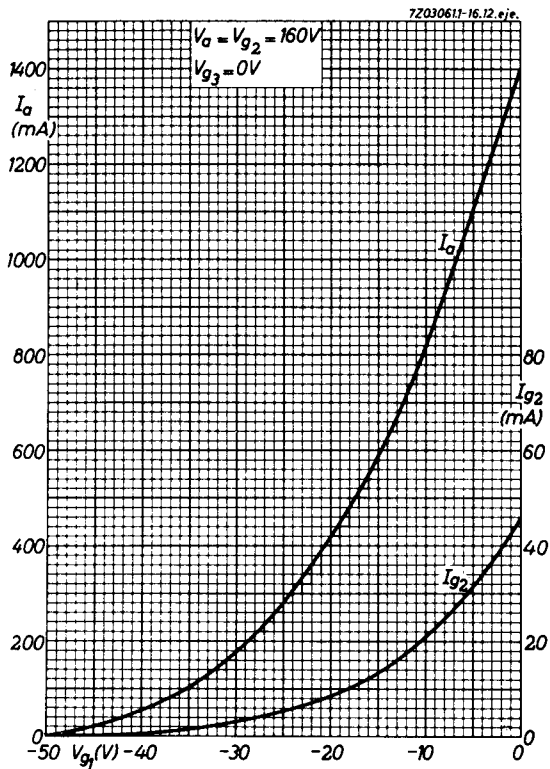

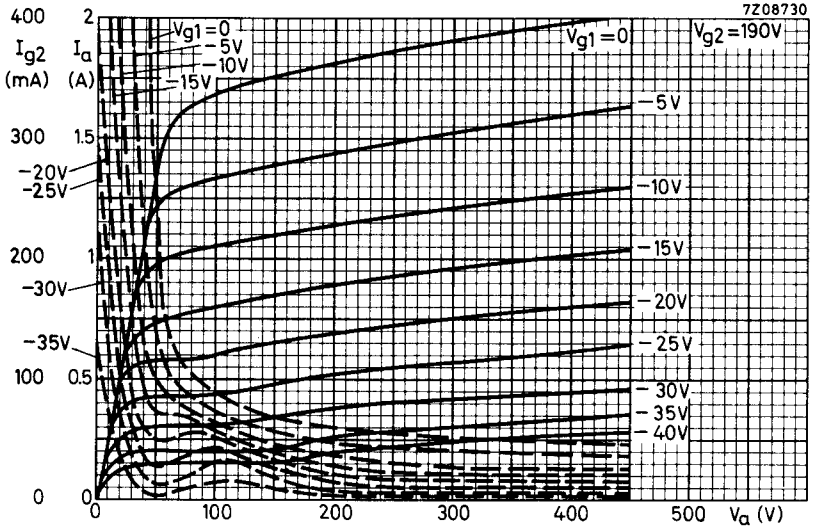



# PHILIPS

Data handbook



Electronic  
components  
and materials

PL519

| <b>page</b> | <b>sheet</b> | <b>date</b> |
|-------------|--------------|-------------|
| 1           | 1            | 1972.01     |
| 2           | 2            | 1972.01     |
| 3           | 3            | 1972.01     |
| 4           | 4            | 1972.01     |
| 5           | 5            | 1972.01     |
| 6           | 6            | 1972.01     |
| 7           | 7            | 1972.01     |
| 8           | 8            | 1972.01     |
| 9           | FP           | 1999.02.24  |